

The DuraServe® Heated Shelf Counter integrates Hatco HBGB heated base glass shelves for uniform, controllable surface heat using food-safe ceramic glass. Ideal for pass-through areas and buffet lines where durable FOH presentation and consistent holding are required.

STANDARD FEATURES

Construction Specifications

- Type 304 stainless steel throughout
- 14-gauge stainless steel top (standard)
- 18-gauge stainless steel cabinet body
- Fully welded cabinet construction
- ¾" plywood substrate under tops
- Fully welded 16-gauge shelving
- Caster/Feet option
 1. Caster
 2. Bullet feet
 3. Flanged Feet
- Stainless front apron with integrated controls

Performance Component – Hatco HBGB Series

- Food-safe ceramic glass heated surface
- Thermostatically controlled base heat
- Lighted On/Off rocker switch (control box)
- Remote control box with conduit and cord/plug

OPTIONS:

Finish:

- ☐ ST (Stainless)
☐ LF (Laminate over Stainless)
☐ LP (Premium Laminate over ¾" plywood)

Tops:

- ☐ SST (Stainless)
☐ SOL (½" Corian®)
☐ QTZ (3 cm Quartz)

Sneeze Guards:

- ☐ NFI (Fixed)
☐ ES90 (Adjustable)
☐ ORBIT900 (Pass-over)

Lighting:

- ☐ HL5 (LED)
☐ GR5AHL (Heated strip w/ LED; RMB ≤ 104°F)

ACCESSORIES:

Tray slides

- ☐ Fixed
☐ Fold-Down
☐ Tubular)

S/S toe-kick


- ☐ Yes
☐ No

Graphic Logo

- ☐ Yes
☐ No

Height

- ☐ Low 30"
☐ Elementary 32"
☐ Standard 34"

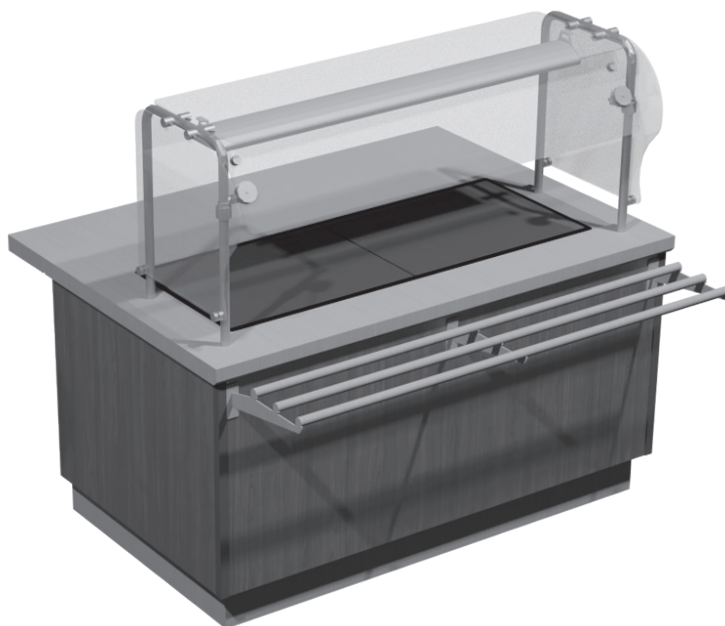

Compliance

- NSF
- UL Listed
- Buy America Friendly

What's Included

- Fully welded base cabinet on casters
- HBGB shelf installed & wired (per model)
- Controls mounted in apron (or remote per spec)
- Documentation & basic hardware

CABINET DIMENSIONS (DuraServe Integration)

HBGB Shelf Nominal Size	24 × 18	30 × 18	36 × 18	48 × 18	60 × 18	72 × 18
DuraServe Cabinet Length (L)	36"	44"	50"	62"	74"	84"
Notes	Cabinet width 36"; height 34"	Cabinet width 36"; height 34"	Cabinet width 36"; height 34"	Cabinet width 36"; height 34"	Cabinet width 36"; height 34"	Cabinet width 36"; height 34"
Plug	NEMA 5-15P	NEMA 5-20P	NEMA 5-30P	NEMA L14-20P	Field hardwire (no cord/plug)	Field hardwire (no cord/plug)

Shelf Model	Nominal Size	Overall Width (in)	Overall Depth (in)	Overall Height (in)	Notes
HBGB-2418	24×18	25.625	19.625	2.2	
HBGB-3018	30×18	31.625	19.625	2.2	
HBGB-3618	36×18	37.625	19.625	2.2	
HBGB-4818	48×18	49.625	19.625	2.2	≥48" uses two glass pieces (seam)
HBGB-6018	60×18	61.625	19.625	2.2	≥48" uses two glass pieces (seam)
HBGB-7218	72×18	73.625	19.625	2.2	≥48" uses two glass pieces (seam)

Cutout note: Countertop min/max cutout dimensions are size-specific; consult the HBGB spec cutout table for each model when templating the counter.

Installation Checklist (Summary)

- Before: verify power, confirm path-of-travel, inspect shipment
- During: position & lock casters, make electrical connection, install guards/lights
- After: remove films, clean stainless, review operation with staff

Service & Maintenance

Provide access panels per model; cleaning SOP per stainless and glass; warranty per Nationwide + component terms.

Linked Technical References

Hatco HBGB Spec Sheet — ([Uploaded: Hatco-HBGB-SpecSheet \(3\).PDF](#))

Electrical & Utilities (per Hatco HBGB nameplate)

Shelf Model	Watts (120V)	Amps (120V)	Watts (100V)	Amps (100V)	Plug (120V)
HBGB-2418	425 W	3.5 A	425 W	4.3 A	NEMA 5-15P
HBGB-3018	525 W	4.4 A	525 W	5.3 A	NEMA 5-15P
HBGB-3618	630 W	5.3 A	630 W	6.3 A	NEMA 5-15P
HBGB-4818	850 W	7.1 A	850 W	8.5 A	NEMA 5-15P
HBGB-6018	1050 W	8.8 A	1050 W	10.5 A	NEMA 5-15P
HBGB-7218	1260 W	10.5 A	1260 W	12.6 A	NEMA 5-15P

International voltages/models available per spec (220/230/240V with corresponding amps and regional plugs). Locate remote control box outside heat zone per spec.